


# LUCE VISION

Solar panel recharger  
Recarga con panel solar



*Luce Vision can be fixed to various surfaces using screws or plastic and metal strips. In addition, the flexibility of its holder allows Luce Vision to be directed towards the sun's rays to increase its effectiveness.*

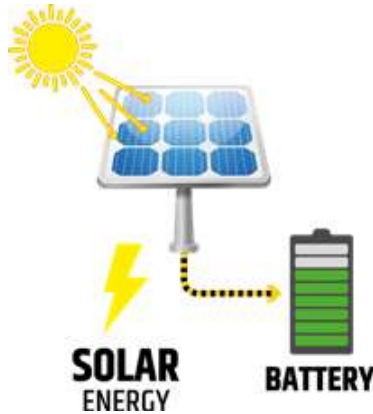


### Características técnicas

- Salida de recarga IP68 compatible con dispositivos Visión y recargables
- Longitud del cable: 5 m
- Rango de temperatura: -10 - 85 °C
- Tensión máxima generado: 5 Vdc
- Podetencia máxima generada: 0.5 W
- Caja en ABS
- 130 mm x 170 mm x 30 mm
- Peso: 350 g

### Technical characteristics

- IP68 Recharge output compatible with Vision and rechargeable devices
- cable length: 5 m
- Temperature range -10 - 85 °C
- Maximum voltage generated: 5 Vdc
- Maximum power generated: 0.5 W
- ABS body
- 130 mm x 170 mm x 30 mm
- weight: 350 g

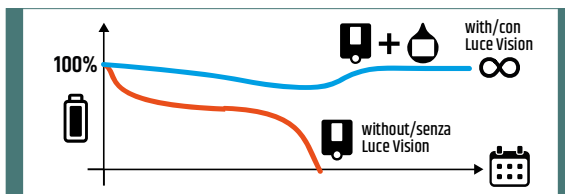

Code	Models
200.1000002	LUCE VISION - PANEL SOLAR / SOLAR PANEL